

D-60 Series Weighing Indicator

The D-60 are easy-to operate indicators its economical indicator housed in A.B.S enclosure.



Technical Data:

Hi resolution Weighing Indicator..
High Quality & economical
Up to 1/10,000 display resolution
6 digits 0.8" LED/LCD display
Low power and overload indication
A.B.S Enclosure, equipped with desktop bracket
Full Duplex RS-232 Serial Port
Drives up to four 350 Ω load cells
weight unit Kg
selectable decimal point position
Operates on AC 220V or Rechargeable battery DC 4V/4Ah


*It is equipped with a large easy to read 6 digits 0.8" LED or LCD display.
A full duplex RS-232 port can transmit data on demand or continuously to match the input requirement of a wide variety of devices including printers. Remote displays and computers.
Rechargeable battery or AC 220V operated.*

Economical Platform scale Indicator!

D-60

Series Weighing Indicator


Interface:

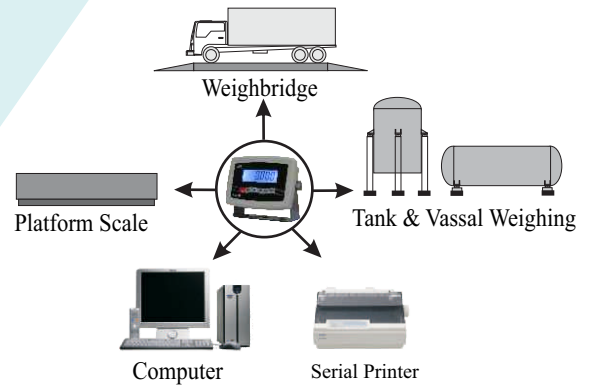

Features:

- Hi resolution Weighing Indicator.
- High Quality / economical Cost
- Up to 1/10,000 display resolution
- 6 digits 0.8" LED/LCD display
- Low power and overload indication
- A.B.S Enclosure, equipped with desktop bracket
- Full Duplex RS-232 Serial Port
- Drives up to four 350Ω load cells
- weight unit Kg and selectable decimal point position
- Full duplex RS232 with multiple communication protocols
- Customized size with your specific request

Physical Dimension

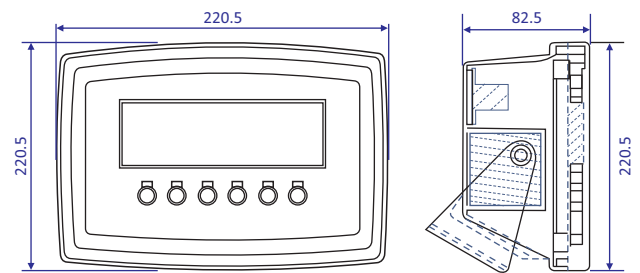

Specifications:

Input sensitivity:	0.1μV//d(Min)
Input single range:	19.5~19.5mv
Load cell excitation:	3.3VDC 50mA
Stabilization time:	1 second typical
Operating temperature:	0° c ~ 50° c / 32° F~ 122° F
Non-linearity:	0.01% of F.S
A/D resolution:	500,000 counts (Max)
keys:	"on/off", "Total", "Hold", "Tare", "Zero", "Set"
Maximum Display:	999999
Minimum Division:	1 X 2 X 5 X 10 X 20 X 50.
Under zero Indication:	"-" minus display
Display Indications :	Hi, Ok, Lo, Battery Charging, Hold, Auto, Net, Gross,
Battery:	4V DC/4Ah
Power:	220V AC 50 Hz

Reliable and Rugged! 